



Portable Generator 300/500/700/1000W Solor Power Station Emergency Power Supply With LCD

Our Product Introduction

for more products please visit us on evstationcharger.com

Basic Information

- Place of Origin: China
- Brand Name: MINKO
- Certification: CE, ROHS
- Model Number: Portable Power Station-M1000
- Minimum Order Quantity: 5 pieces
- Price: negotiation
- Packaging Details: L210xW85xH52 (mm)
- Delivery Time: 8 -10 working days
- Payment Terms: T/T, Western Union, MoneyGram, Paypal, Skrill, Transferwise
- Supply Ability: 1000000 pieces per month



Product Specification

- Rated Power AC: 1000W
- Capacity: 999Wh
- Power Indicate: LCD Display
- Solar Charging Input: 18-23V/3A(60W Max)
- Wireless Charge Output: 10W
- Discharging Temperature Range: 14~104°F(-10~40°C)
- Housing Material: ABS+PC
- Operation Humidity: 10%~90%
- Highlight: 1000w portable power station with solar, 500w Rechargeable Portable Power Station, 300w Rechargeable Portable Power Station



More Images



Product Description

Portable Generator 300/500/700/1000W Solor Power Station Emergency Power Supply With LCD

Features of Portable Power Station

UL certified vehicle level lithium battery
 super inverter technology maximum support 1500W equipment (US standard Japanese standard 120V) and maximum support 2000W equipment (Central Europe Australian-British South African standard 230V)
 1000W rated output
 full large capacity 1 KWH electricity
 modeling IP armor warrior
 compared to this product size Mini weight light

Apply to: Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook, camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing, environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

Product Specification

Rated Power AC	1000W
Capacity	999Wh (22.2V/45A or 3.7V/270000mAh)
Battery type	UL Li-ion
Power Indicate	LCD display
LCD Display	Battery remaining capacity, Battery fault, total output power, Over temperature, input power
DC Input	DC24V/6.25A(150W max, adapter with UL, CCC, CE, PSE, FCC)
DC fully Charging Time	About 7~8H
Solar Controller Model	MPPT
Solar Charging Input	18-23V/3A(60W max)
Charging Temperature Range	32~104°F(0°C~40°C)
USB Output	Type-C output: PD 60W(5V3A, 9V3A, 12V3A, 15V3A, 20V3A)*1 USB-A output: QC3.0(18W/5V3A, 9V2A, 12V1.5A)*3(total 54W)
Wireless Charge Output	10W
Cigarret Lighter output	12V/10A(120W)
DC output	12V/5A/DC5521*2(total 120W)
LED light	5W*2(total 10W Max) SOS, flashlight
AC Output	Output waveform: pure sinewave
	Output voltage: 110V(US/JP) or 220V(EU/UK/AU/CN) (AC output voltage and frequency are customized, according to different countries and regions. Please refer to the actual product)
	Output frequency: 50/60Hz
	Peak AC output: 2000W AC continuous output: 1000W
Discharging Temperature Range	14~104°F(-10~40°C)
Product size/Weight	328*221*263mm/about 8.9Kg
Carton Size/Weight	32.5*25*36.5CM/about 11.3Kg/1PCS
Protections	over-charging, short-circuit, low-voltage, over-temperature and over-discharging protection
Color	Oranger+gray, Blue+gray, Red+gray, Green+gray
Housing Material	ABS+PC (fireproofing V0)
Working Temperature	-15~45°C
Operation Humidity	10%~90%
Standard Package Include	1*M1000 portable power supply, 1*150W power supply, 1*User Manual, ,color box packaging, 1*MC4 charging cable, 1*vehicle charging cable, 1*straps
Warrantly	12 months

9 Protections Strictly Abide By Charging Safety

Overcurrent protection
 Short-circuit protection
 Over discharge protection
 Low temperature protection
 High temperature protection
 Overvoltage protection
 Overload protection
 Signal interference protection
 Overcharge protection

THREE CHARGING METHODS

Meet the needs of different scenarios

There are three charging methods of AC/Solar/Car charger to meet the requirements of a variety of equipment.



Wall Charger
700W Max



Solar Charger
400W Max



Car Charger
12V

AC full charged
within **1.5~2.5**
Hours




Equipped with Uninterruptible Power Supply (UPS)

with UPS function, protect equipment from damage

In UPS mode, when the AC input power of the mains is cut off due to a power outage, the AC input power of the mains can be used in about automatic switch to the product battery within 10 ms to ensure AC output



Function Panel

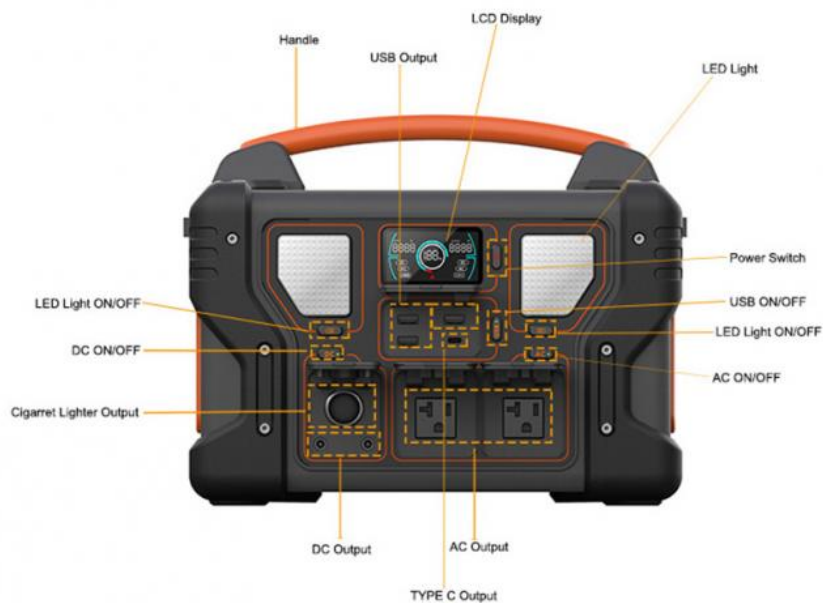

More use scenarios



MINKO (SZ) TECHNOLOGY CO., LIMITED



+8613539872669



yumiko@szminko.com



evstationcharger.com

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ